

UL1095


Hook-Up Wire 连接线

■ 产品描述

- 额定温度: 80° C
- 额定电压: 300V
- 导体: 单支或绞合 30~16AWG 镀锡或裸铜
- 绝缘: PVC
- 阻燃等级: VW-1及CSAFT1、FT2
- 参考标准: UL758 UL1581 UL2556
- 适用范围:
- 用于一般电子、电器设备内部连接线
- 颜色:
- 棕, 红, 橙, 黄, 绿, 蓝, 紫, 灰, 白, 黑, 黄/绿等

■ PRODUCT DESCRIPTION

- Rate temperature: 80° C
- Rate voltage: 300V
- Conductor: 30~16AWG (Solid or stranded, tinned or bare copper)
- Insulation: PVC
- Flame test: VW-1&CSAFT1、FT2
- Reference standard: UL758 UL1581 UL2556
- Application: For internal wiring of electronic and electrical equipment
- Color: Brown, Red, Orange, Yellow, Green, Blue, Purple, Grey, White, Black, Green/Yellow, etc

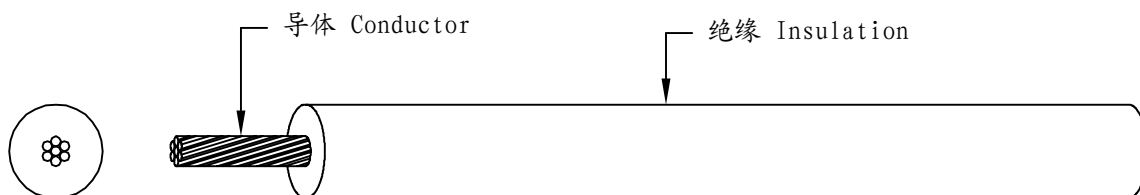

■ 印字 MARKING

AWM 1095 ()AWG 80° C 300V VW-1 E332441 YAobo cAWM I A 80° C 300V FT1

■ 产品结构 CABLE CONSTRUCTION



| 导体 CONDUCTOR | | | 绝缘 INSULATION | | 最大导体电阻 MAX. COND. RESISTANCE (Ω/km, 20°C, DC) | 标准长度 STANDARD PUT-UP | |
|-----------------|--------------------------------|--------------------|-------------------------|---------------------|--|-------------------------|--------------|
| 规格 AWG | 构造 CONSTRUCTION (No./mm) | 外径 DIA. (mm) | 厚度 THICKNESS (mm) | 外径 O. D. (mm) | | 英制 Ft/Roll | 公制 M/Roll |
| 30 | 7/0.1 | 0.30 | 0.33 | 0.96 | 376.96 | 2000 | 610 |
| 28 | 7/0.127 | 0.39 | | 1.05 | 237.25 | 2000 | 610 |
| 26 | 7/0.160 | 0.49 | | 1.15 | 148.94 | 2000 | 610 |
| 24 | 11/0.160 | 0.61 | | 1.30 | 93.25 | 2000 | 610 |
| 22 | 17/0.160 | 0.76 | 0.35 | 1.45 | 55.0 | 2000 | 610 |
| 20 | 21/0.178 | 0.94 | | 1.65 | 34.6 | 2000 | 610 |
| 18 | 34/0.178 | 1.20 | | 1.90 | 21.8 | 2000 | 610 |
| 16 | 26/0.254 | 1.50 | | 2.20 | 13.7 | 1000 | 305 |